
DARB Transfer Device




C&M is the exclusive licensee for Intralox Activated Roller Belt for North and South America for the corrugated and folding carton market. Units shown incorporate licensed technology which is patented.

Leading supplier to



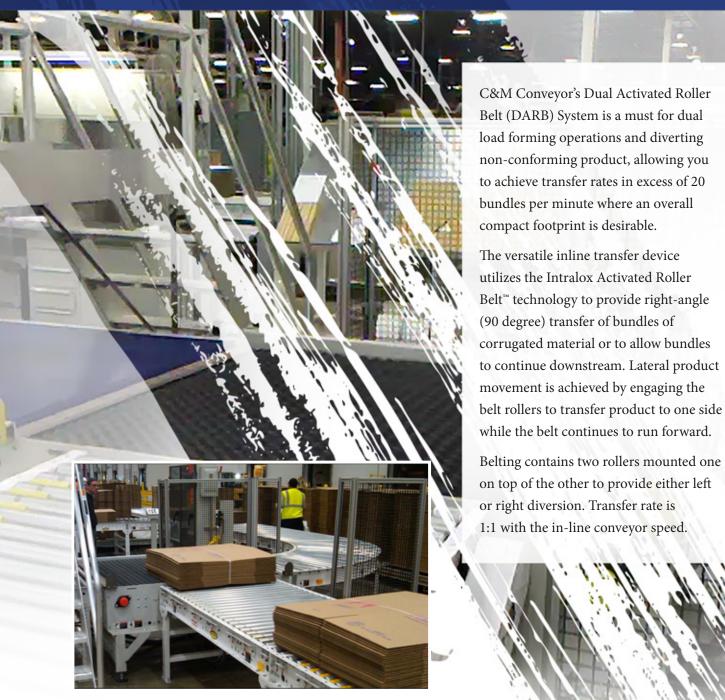

DARB Transfer Device

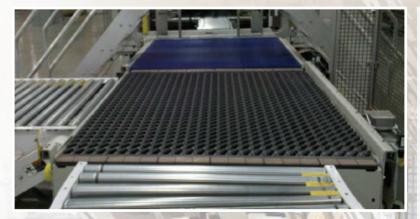



Features and Benefits

Allows two direction bundle diversion without stopping

- · Increases product throughput.
- Loads can be sent straight through or diverted 90° enhancing the flexibility of order processing.

Variable Speed Discharge

• Throughput may be tailored, as required, based on bundle type.

Processes tied and untied bundles

 Offers greater flexibility in bundle type that can be processed by the unit.

Low Maintenance

Maintenance-free grease-packed drivetrain.

Safety

 Guarding on all moving parts, radius corners reduce sharp edge injury risk, belt has closed surface with fully flush edge.

Adjustable Height

 Top of belt height is adjustable from 32-in. to 34-in.

Specifications

Width 54 Inches Length 68 Inches	
Length 68 Inches	1111
Longin co mones	All C
Top of Belt Height 33 Inches*	11 / V
Conveyor Speed 50-200 FPM**	
Control Voltage 120v AC, 24v D0	C
Gearmotor Rating 2 HP	-
Voltage 190/380V, 230/4	60V, 575V
Load Rating 400 lb max load	1

- * Custom options available on request
- ** Based upon application; bundles must be tied to utilize higher rates)

© 2014 C&M Conveyor, Inc.

All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.



Leading supplier to the corrugated box industry

C&M CONVEYOR

P.O. Box 379 • 4598 State Road 37 • Mitchell, IN 47446 812-849-5647 • 800-551-3195 • www.cmconveyor.com



